


all-purpose bulk material feeder
easy to dismantle and clean
space-saving no bridging thanks to straight-walled hopper
flexible hopper with external agitation

flexibility

simple and quick ingredient changeover

low height patented trapezoidal shape
gentle feed capability global service
large hopper cross sections

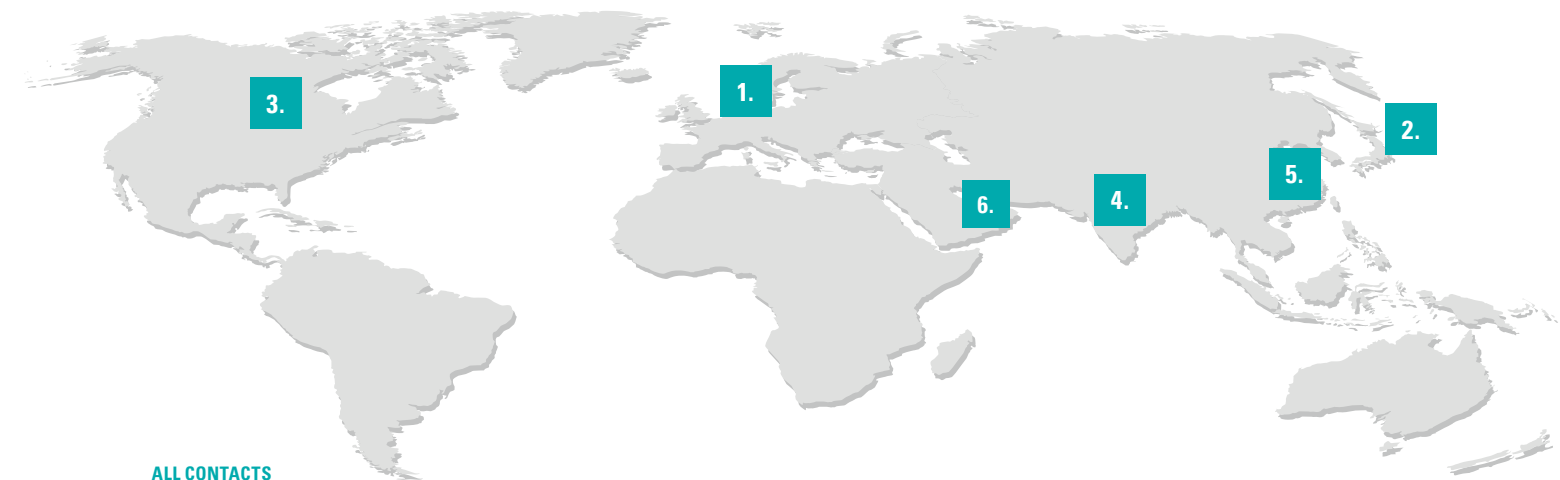

ALL CONTACTS



1.

**KUBOTA BRABENDER TECHNOLOGIE
HEADQUARTERS**

Kubota Brabender Technologie GmbH
Kulturstrasse 49
47055 Duisburg, Germany

2.

**KUBOTA CORPORATION
HEADQUARTERS**

Kubota Corporation
Precision Equipment Division
2-47, Shikitsuhigashi 1-chome,
Naniwa-ku, Osaka 556-8601 Japan

3.

**KUBOTA BRABENDER TECHNOLOGIE
NORTH AMERICA**

Kubota Brabender Technologie Inc.
6500 Kestrel Road, Mississauga
Ontario L5T 1Z6, Canada

4.

**KUBOTA BRABENDER TECHNOLOGIE
INDIA**

Kubota Brabender Technologie GmbH
CJ-231, Ground Floor, Sector-II,
Salt Lake City, Kolkata-700091, India

5.

**KUBOTA BRABENDER TECHNOLOGY
VR CHINA**


Kubota Brabender Technology
(Beijing) Co. Ltd.
3rd F, B Section, No. 3 Workshop,
2nd Project of Guanglian Industrial Park,
No. 2 Kechuang East 5th Rd.,
Opto-Mechatronics Industrial Park
Tongzhou, Beijing 101111, China


6.

**KUBOTA BRABENDER TECHNOLOGIE
MIDDLE EAST**

Kubota Brabender Technologie
Middle East FZE
Business Centre Sharjah
Publishing City Free Zone, Sharjah
United Arab Emirates
P.O.B. 18139 Dubai


FLEXWALL® PLUS
THE VERSATILE

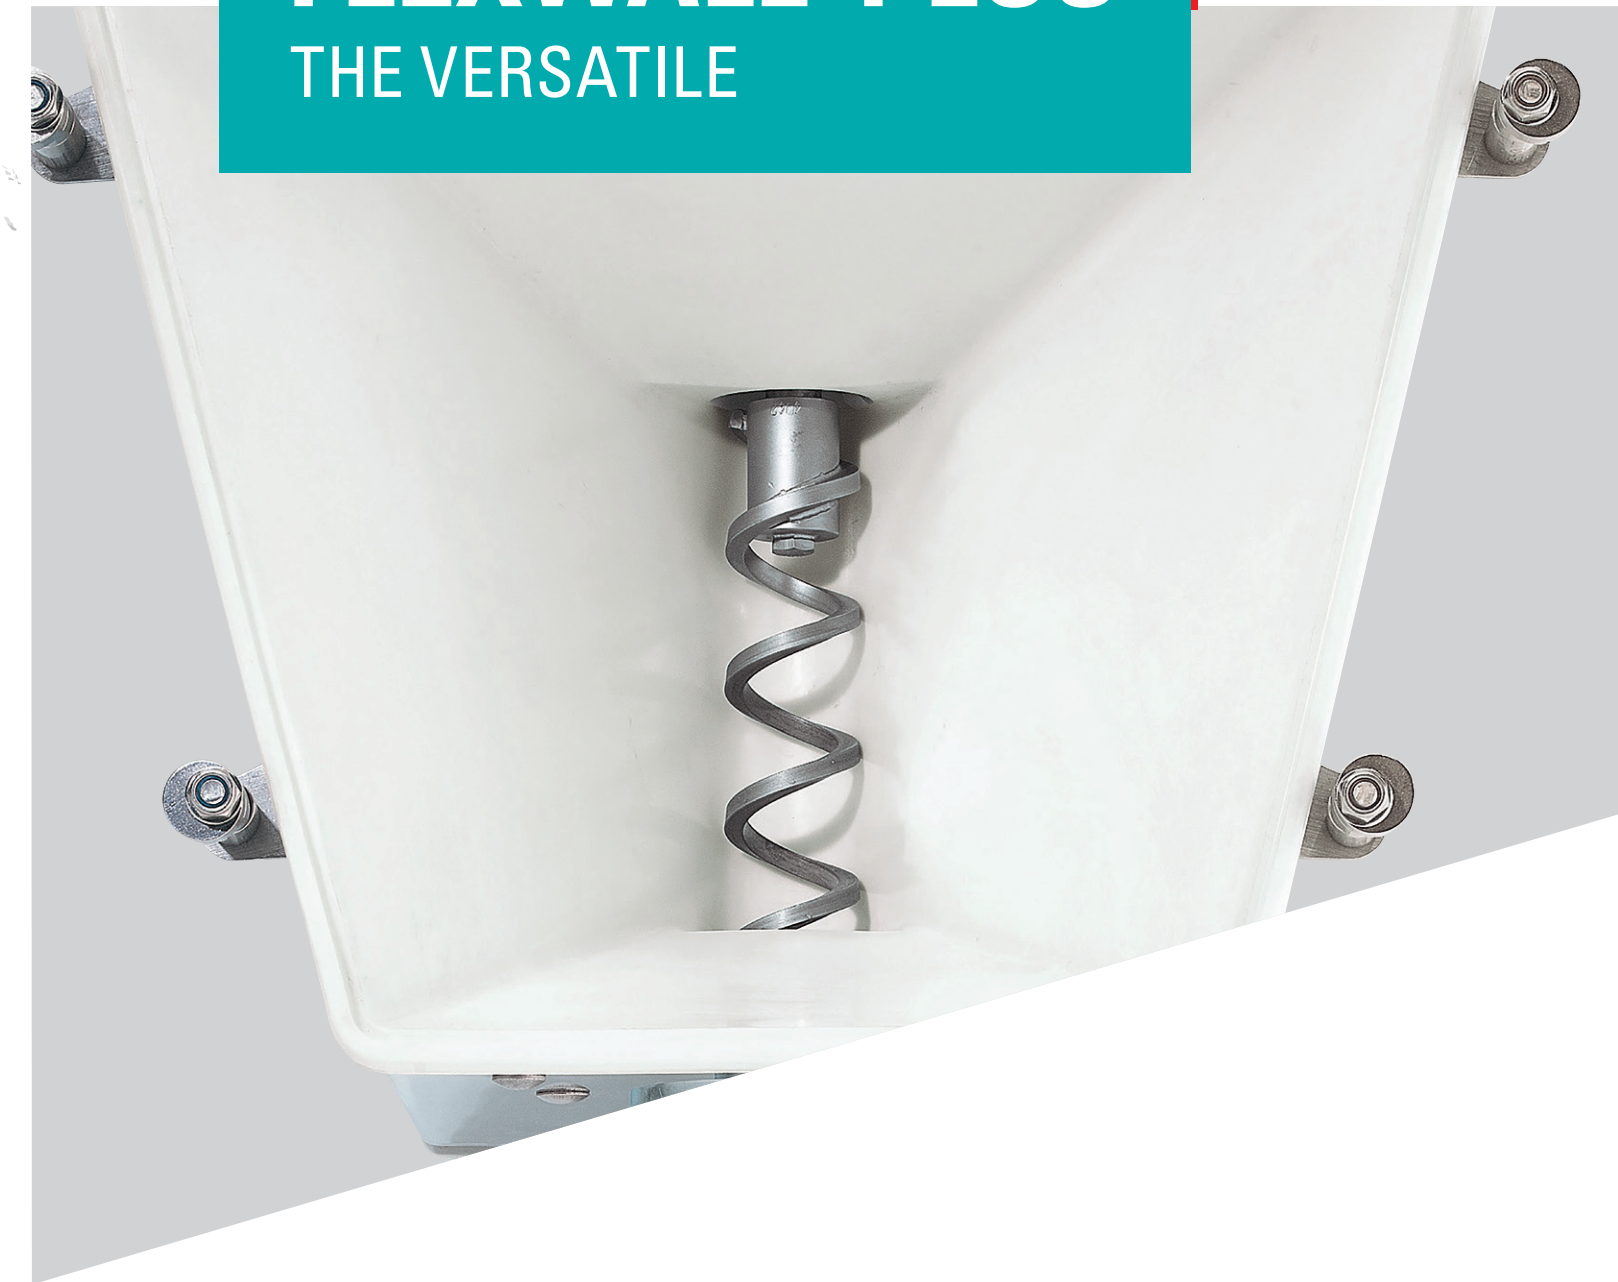

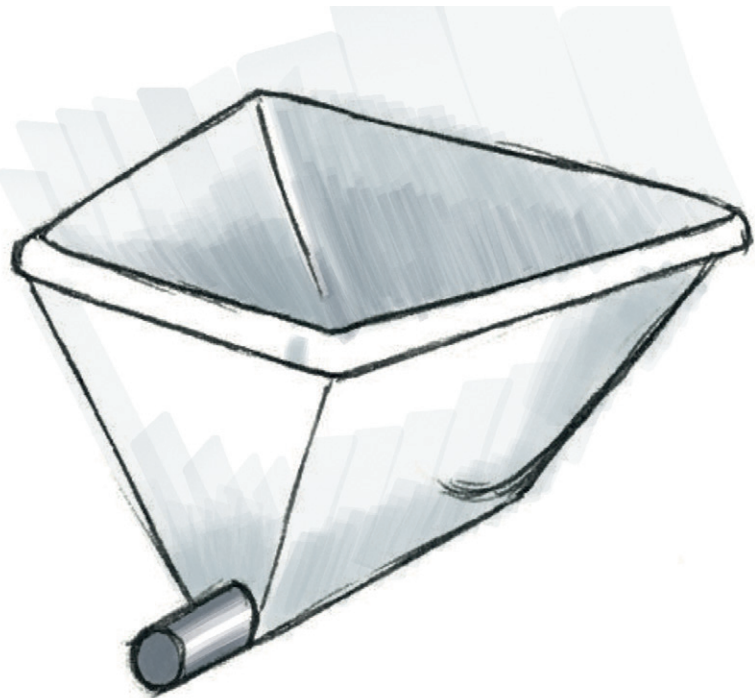


FLEXIBLE POLYURETHANE HOPPER

Thanks to its flexible, polyurethane hopper with external massaging paddles, the FlexWall® Plus is suitable for use with practically all free-flowing and even poor flowing bulk materials and fibers. It is food-safe in accordance with European and US regulations. Anti-static or chemical-proof versions are available.

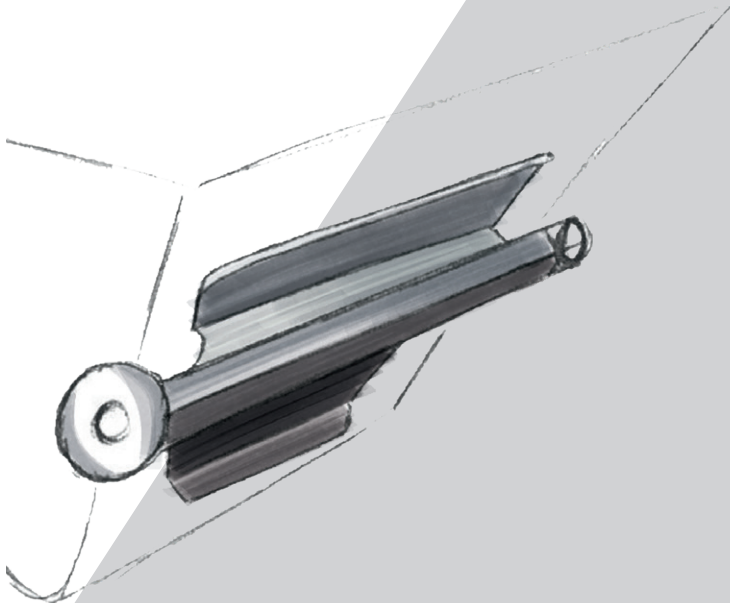

MASSAGE PADDLE

The external massaging paddle enables bulk materials to flow without compacting, bridging or ingredient build-up. The paddle amplitude can be adjusted to provide gentle ingredient flow.


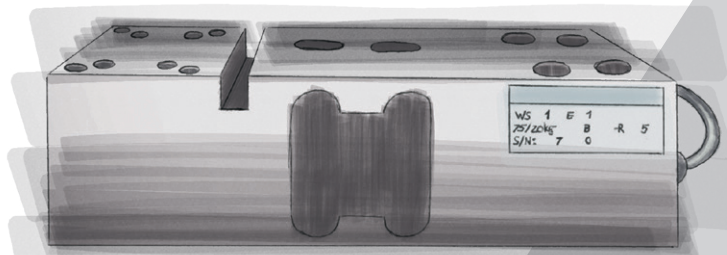


LOAD CELL

Analogue or digital load cells are available to match your application.


MOTOR

The FlexWall® Plus features a frequency-controlled electric AC motor. The hinged motor version is particularly suitable for easy screw removal from the rear. For difficult flowing ingredients, a second motor for the massaging paddles is available.

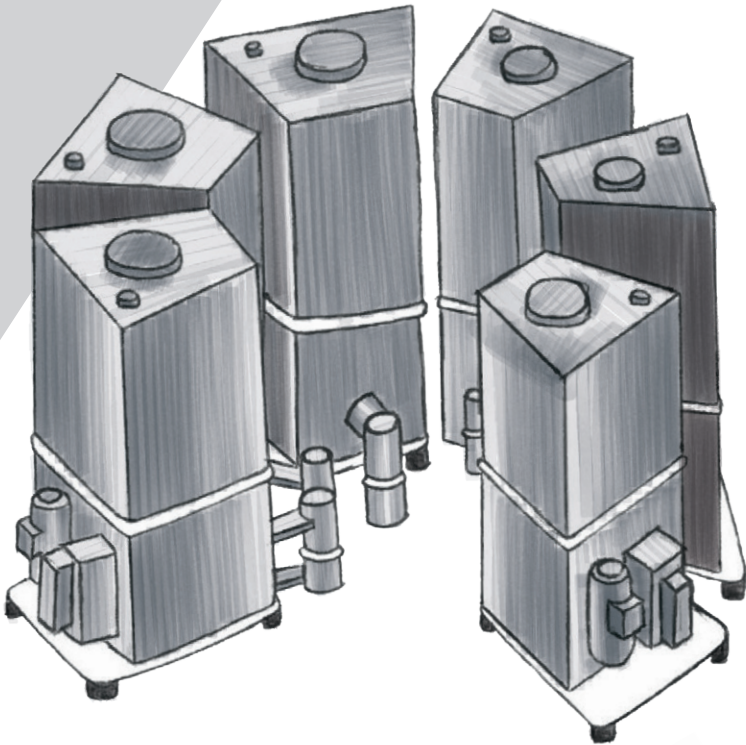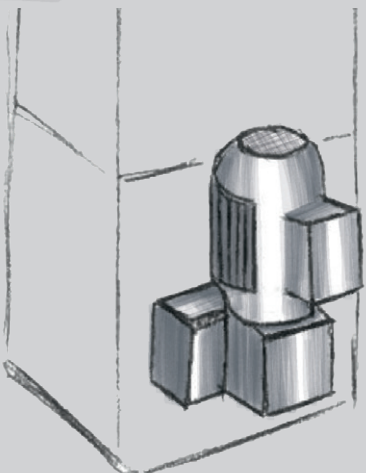

TRAPEZOIDAL SHAPE

The FlexWall® Plus patented, compact trapezoidal shape enables multiple feeders to be arranged around a central feed point without requiring extended screws to reach the downstream process vessel.

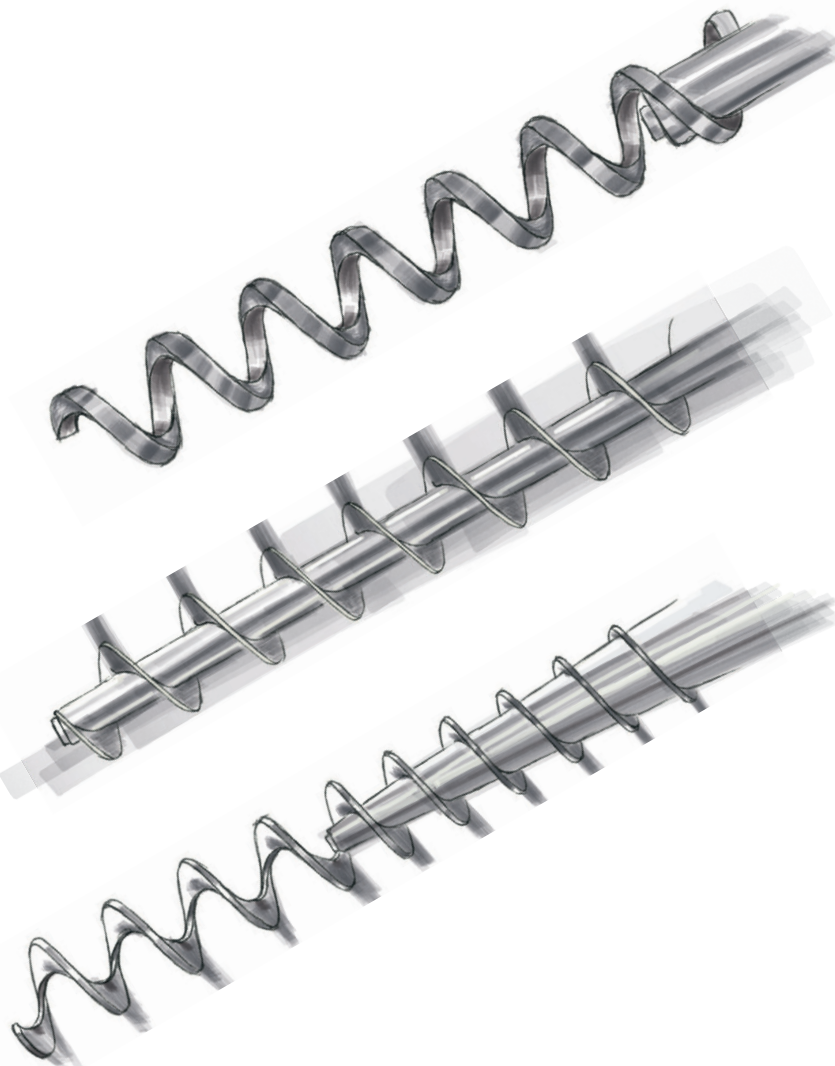

SPIRAL SCREW

Spiral screws are suitable for feeding both pellets and powders.

BLADE SCREW

Blade screws are the right choice for floodable powders.

FIBER SCREW

Fibers require a special design of screw.

FW40plus

MODEL	Motor	PRM	Paddles	Separate Paddle Drive
1	hinged	192 (335)	no	no
2	hinged	192 (335)	yes	yes
5	fixed	192	yes	no
6	fixed	192 (335)	no	no
7	fixed	192 (335)	yes	yes

PERFORMANCE RANGES

Powder	up to 1075 dm³/h (37.9 cuft/hr)
Pellets	up to 749 dm³/h (26.4 cuft/hr)
Fibers	up to 648 dm³/h (22.8 cuft/hr)
Min. output	3 kg/h (1.3 lb/hr)

FW80plus

MODEL	Motor	RPM	Paddles	Separate Paddle Drive
1	hinged	192 (335)	no	no
2	hinged	192 (335)	yes	yes
5	fixed	192	yes	no
6	fixed	192 (335)	no	no
7	fixed	192 (335)	yes	yes

PERFORMANCE RANGES

Powder	up to 7619 dm³/h (269 cuft/hr)
Pellets	up to 5984 dm³/h (211.3 cuft/hr)
Fibers	up to 2213 dm³/h (78.1 cuft/hr)
Min. output	10 kg/h (4.5 lb/hr)